




The Touch Panel Display can control Acuity laser sensors and display their distance readings. Using serial communications, this smart terminal includes software applications for calculating thickness and other dimensions without the need for a computer or software programming.

Touch Panel Display

Product Description

The Acuity™ Touch Panel Display is a stand-alone terminal interface for use with Acuity laser distance sensors. These fully-enclosed units replace panel meters, alphanumeric displays and analog controllers by providing a modern interface through a full-color LCD and touch screen. The Touch Panel Display communicates with one or two Acuity sensors using their serial

their distance outputs. Relative dimensions can be measured using a tare function. With dual RS232 serial inputs from two acuity sensors, the touch panel serves as a thickness gauge and display, an application which previously demanded a PC computer and custom software programming. Using a single RS485 serial interface, the Panel can transmit thickness and dimensional information to external devices.

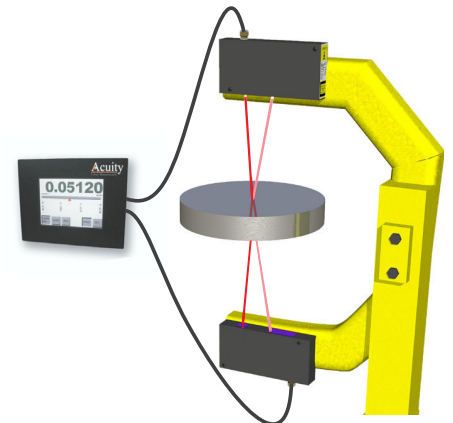

data from Acuity sensors

measuring sensors

interface


feature.



units in inches [metric]

Supply Power	12 - 24 Volts DC, 6 Watts maximum
Enclosed Outside Dimensions	137.7 W x 110.0 H x 38.1 D mm 5.42 W x 4.33 H x 1.50 D inches
Display Viewing Area	64.3 W x 63.5 H mm 3.31 W x 2.5 H inches
Display type	TFT, 256 Colors
Viewing angles	+/- 65° Horizontal, 50° Up, 65° Down
Screen Resolution	320 x 240 (QVGA)
Display Brightness	350 cd/m ² , 50,000 hours (typical) to half initial brightness
Touch Panel Type	Resistive
Operating Temperature	-20° to 70°C, -4° to 158° F
Environmental	NEMA – 4X, IP65 front bezel when panel-mounted with sealing gasket. Compliant with the RoHS directive regarding the reduced use of lead and other hazardous substances.
Weight	70 grams, 1.4 lbs.
Interface Options	Two RS232 with ESD protected transceiver One RS485 interface - Full or Half Duplex 9600 to 230,400 Baud
Interface & Power Connectors	two-part <i>Phoenix Contact</i> screw connector: MC 1.5/X-ST-3.81
	FCC Part 15, Class A, CE Mark CISPR22, CNS13438, EN55022, ICES-003, VCCI


Mechanical Dimensions units in inches [mm]

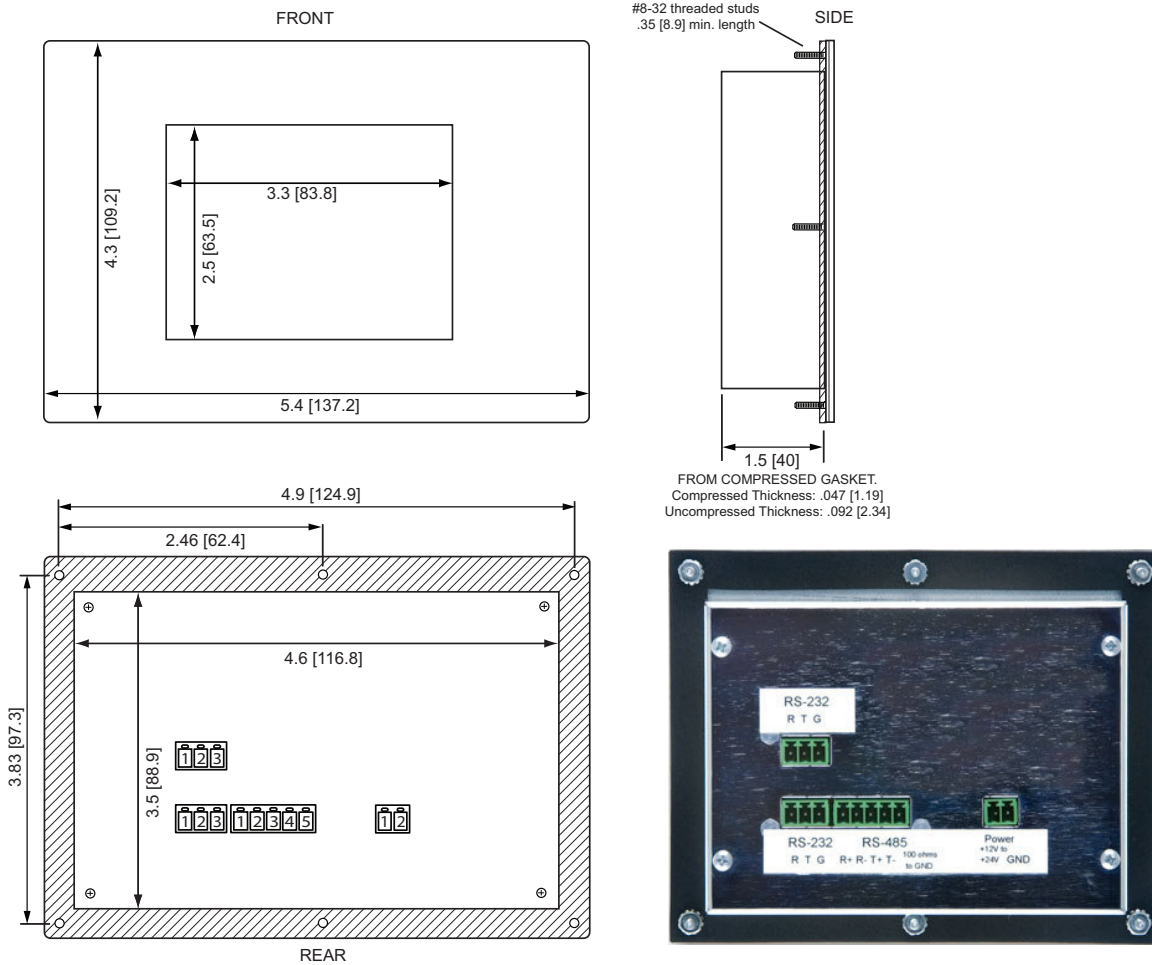

Compatibility

The Touch Panel Display is designed for use with Acuity™ brand sensors. We suggest connecting the sensor(s) to the

The Connectivity kit makes it simple to bring both the RS232 serial interface and the DC voltage to between the Touch Panel Display and the sensor.

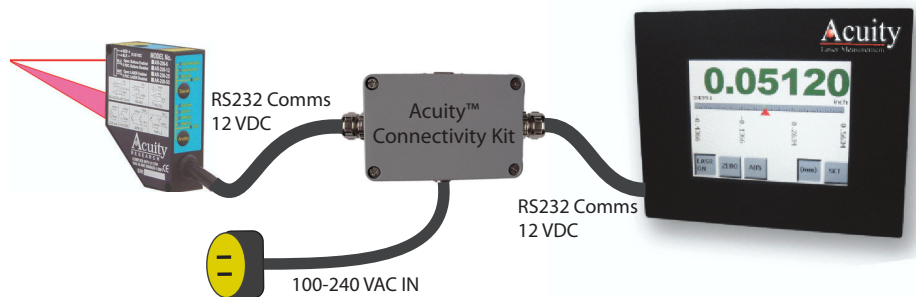

Contact Acuity

Schmitt Measurement Systems, Inc.
2765 NW Nicolai Street, Portland, Oregon, 97210, USA
Tel: 503-227-5178 Fax: 503-227-5040
www.acuitylaser.com



Laser measurement products from



Rev 1/09
© 2009 Schmitt Measurement Systems, Inc.

